



## INSTALLATION INSTRUCTIONS FOR DPM TELESCOPIC SYSTEMS SPRINGFIELD ARMORY XD 3.0" - XD(M) 3.8" etc.


**ATTENTION:** The External Springs the System includes, are Conical. Always Install the Open Tight Coil to the Flange.

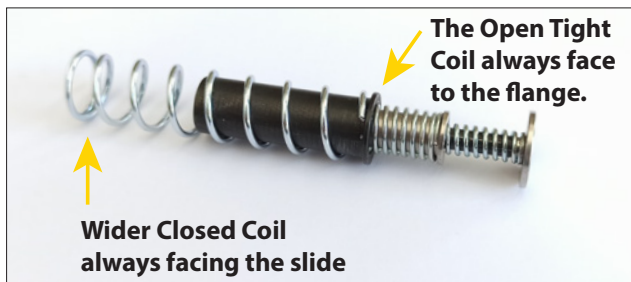



With the Wider Coil facing the Slide, Push from the middle section, until the rod will pass through the Slide hole a few millimeters. (Fig. 1 & Fig. 2)

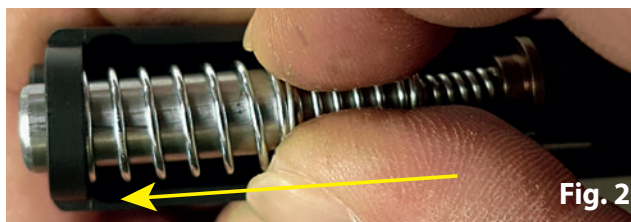

**Let the Rod return carefully (Fig. 3) in the Correct Position on the Barrel (Fig. 4). Reassemble the Pistol. Rack the Slide to Confirm Proper Unrestricted Function.**

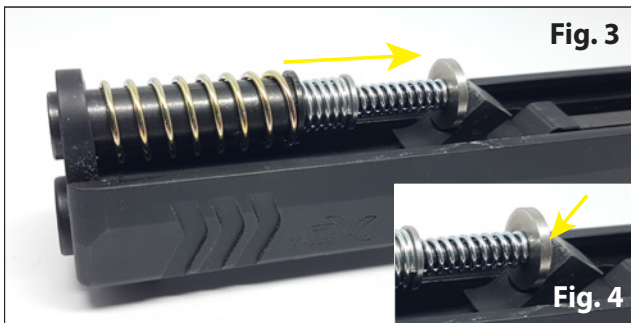

**To Disassemble, Push Forward with your Thumb from the behind to Release the System from the Barrel (Fig. 5) and Carefully Retrieve the System in your other Hand (Fig. 6).**

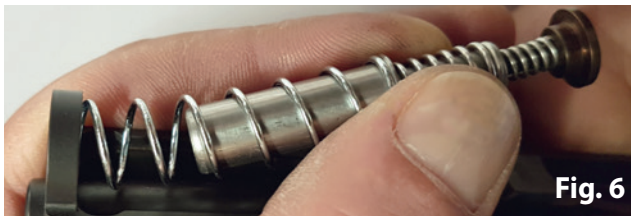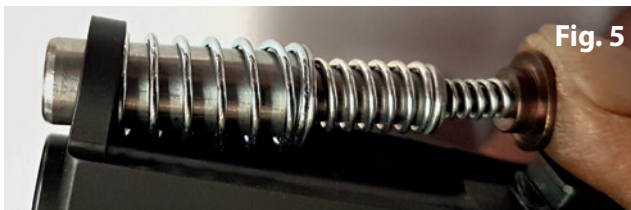

For any questions contact the Dealer who supplied you this product or contact us: [service@dpmsystems.com](mailto:service@dpmsystems.com)  
Video instructions: [www.dpmsystems.com/faqs](http://www.dpmsystems.com/faqs) Instructions Telescopic